


## Lightsource Test Report

### Product Information

Product Category: LK2H252-24-NW-33      Product Type: 3149  
Product Spec:

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3866$   $y=0.3719$      $u(u')=0.2311$   $v=0.3336$   $v'=0.5003$   
 CCT:  $T_c=3797K$  ( $duv=-0.00401$ )      Color Ratio:  $R=0.217$   $G=0.735$   $B=0.048$   
 Peak Wavelength: 457.8nm      Half Bandwidth: 28.4nm  
 Dominant Wavelength: 582.1nm      Color Purity: 0.276  
 CRI:  $R_a=95.9$ ,  $avgR(1\sim14)=94.7$ ,  $avgR(1\sim15)=94.7$     TM30:  $R_f=90$ ,  $R_g=99$   
 $R_1=96$      $R_2=96$      $R_3=98$      $R_4=96$      $R_5=95$      $R_6=94$      $R_7=94$      $R_8=95$   
 $R_9=93$      $R_{10}=93$      $R_{11}=98$      $R_{12}=76$      $R_{13}=95$      $R_{14}=99$      $R_{15}=94$   
 Color Quality Scale:  $Q_a=94.8$ ,  $Q_f=94.1$ ,  $Q_p=96.4$ ,  $Q_g=100.8$   
 $Q_1=91$      $Q_2=97$      $Q_3=93$      $Q_4=90$      $Q_5=91$      $Q_6=94$      $Q_7=99$      $Q_8=98$   
 $Q_9=99$      $Q_{10}=100$      $Q_{11}=99$      $Q_{12}=99$      $Q_{13}=98$      $Q_{14}=97$      $Q_{15}=95$

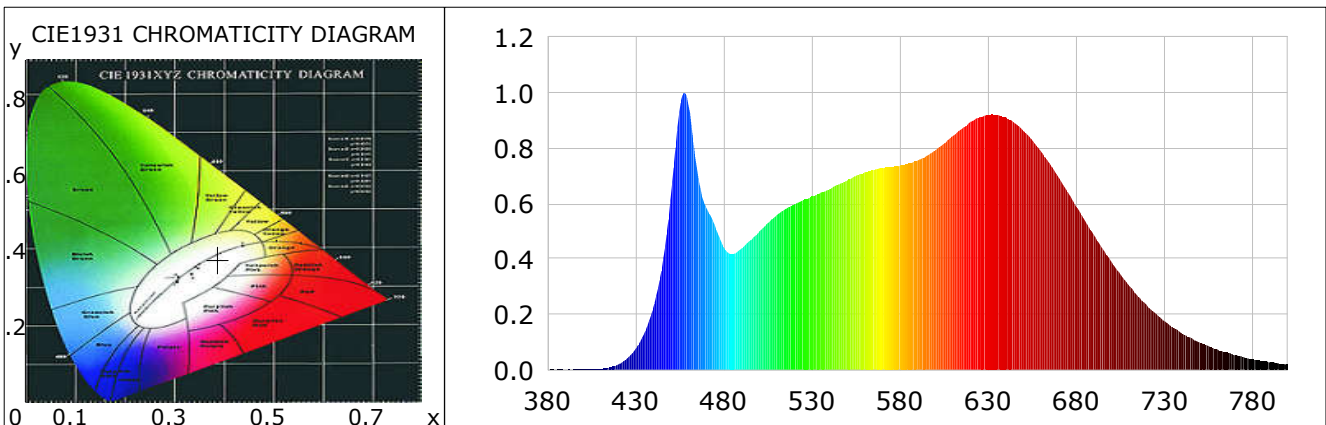

### Photometric Parameters

Luminous Flux: 2435.96 lm      Efficiency: 100.98 lm/W      Radiant Power: 9.169 W  
 EEI: 0.13      Energy Efficiency Class: A+ (EU 874-2012)

### Electric Parameters

Voltage: 24.000V      Current: 1.0052A      Power: 24.12W  
 Power Factor: 1.0000      Frequency: 0.00Hz

### Test Information

Scan Range: 380~800:1nm      Photometric Method: sphere-spectroradiometer  
 Stabilization Time: 1 Sec      Photometric Condition: Sphere diameter: 1.50m, 4PI  
 Max of Signal: 44666 (4175)      CCD Integration Time: 93.75 ms

Condition:  $T_x=29.9^\circ C$ ,  $T_i=28.6^\circ C$ , R.H.:60%  
 Test Lab:  
 Operator:

Test Device: Lisun LMS-9000A(Plus)  
 Test Time: 2018-08-02 12:42:34  
 Inspector: